


Place counter sink bolt into counter sink side of the plate



Loosely fit all bolts and nuts

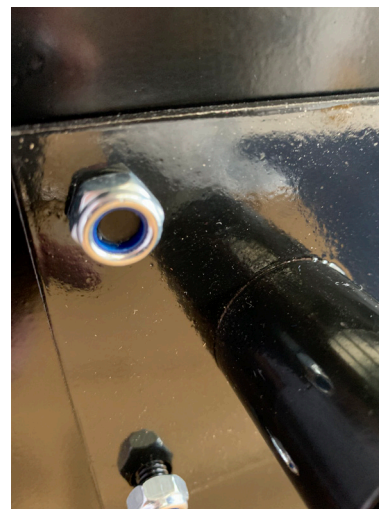

Place allen key into bolt



Place spanner on the nut



Turn the allen key while holding the nut with the spanner. Keep turning the allen key until the bolt passes all the way through the blue nylon locking ring on the nut. Tighten fully.